

TURPA50G65G-3325

50-65GHz, Gain:33dB, Psat:25dBm

Feature:

- Ultra Wide Band: 50-65 GHz
- Gain: 33 dB Min
- Psat Output Power: 25 dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	50-65			GHz
小信号增益 Small Signal Gain	33	36		dB
增益平坦度 Gain Flatness		±3		dB
线性输出功率 Output P1dB	22	23		dBm
饱和输出功率 Output Psat		25		dBm
输入驻波 Input VSWR			2.0	:1
输出驻波 Output VSWR			2.0	:1
直流电压 DC Voltage		4	5	V DC
直流电流 DC Supply Current		1.7		A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	1.85mm Female/1.85mm Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	80*80*15	mm
重量 Weight	/	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+5 V
输入功率 RF Input Power	+5 dBm



Unit: mm

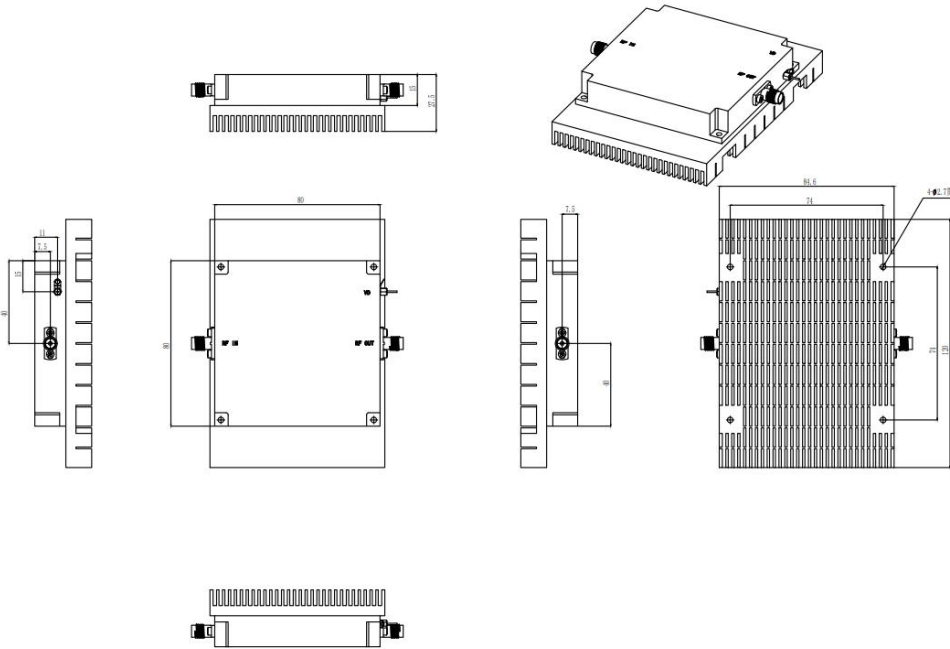

***Heat Sink Required During Operation



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+55	°C
存储温度 Non-operating Temperature*	-55		+75	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
------------------	----------------	--------------